

2000W Modified Sine Wave DC - AC Power Inverter

Inverter Expert **CAR Series - CAR2K**



FEATURES: ■

I/P voltage: 12V DC or 24V DC or 48V DC ◀

Output voltage: 100/110/120V AC or 220/230/240V AC ◀

Output frequency: 50/60Hz ±3 ◀

I/P protections: Bat.Low alarm; Bat.Low shutdown; Over voltage; Polarity reverse ◀

O/P protections: Over load; Short circuit; Earth fault; Over temperature; Soft start ◀

Output waveform: Modified Sine Wave ◀

Design: High frequency design ◀

Topology: Microprocessor ◀


No load current draw: Low power consumption (standby) ◀

In front panel: With power ON/OFF switch and LED indicator ◀

ON/OFF remote control: optional ◀

Cooling fan: Load controlled or temperature controlled cooling fan (optional) ◀

Output Receptacle (optional)



■ SPECIFICATION:

Model	CAR2K-121	CAR2K-122	CAR2K-241	CAR2K-242	CAR2K-481	CAR2K-482	
Output	AC Voltage	110V	230V	110V	230V	110V	230V
	AC Voltage Range	100~120V AC	220~240V AC	100~120V AC	220~240V AC	100~120V AC	220~240V AC
	AC Regulation	± 10%					
	Rated Power	2000W					
	Peak Power	4000W(few seconds)					
	Waveform	Modified Sine Wave					
	Frequency	50/60Hz ± 3					
	USB Port	5V 2.1A					
	LED Indicator	Green for power on, Red for power failure / protection status					
Cooling fan	Control by load						
Input	DC Current	200A	100A	50A			
	No Load Current Draw	1.1A	1.1A	1.1A			
	DC Voltage	12V	24V	48V			
	Voltage Range	9.5~16V DC	19~32V DC	38~64V DC			
	DC Connector	BVR10 battery clip * 2ea	BVR10 battery clip * 1ea	BVR6 battery clip * 1ea			
Protection	Efficiency	≥90%					
	Low Voltage Alarm	11 ± 0.5V DC	22 ± 1V DC	44 ± 1V DC			
	Low Voltage Shutdown	9.5 ± 0.5V DC	19 ± 1V DC	38 ± 1V DC			
	Reset Voltage after L. V. S	11.5V~12V DC	23~24V DC	46~48V DC			
	Overload	Shut off o/p, re-power to recover					
	Over Voltage	15 ± 0.5V DC	30 ± 1V DC	60 ± 2V DC			
	Over Temperature	45 ± 5°C/113 ± 9 °F					
	Output Short-circuit	Shut off o/p, when output is short circuit					
	Reverse Polarity	By fuse open					
	Replaceable Fuse	30A*8	15A*8	7.5A*8			
Soft Start	Yes, 3~5's						
Earth Fault	Shut off o/p when the load has electric leakage						
Environment	Working Temp.	0~30°C @ 100% load; 40°C @50% load					
	Working Humidity	20%~90% RH non-condensing					
	Storage Temp., Humidity	-30~+70°C/-22~+158°F, 10~95%RH					
	Temp. Coefficient	± 0.05%(0~50°C)					
Safety&EMC	Isolation Resistance	I/P-O/P:100M Ohms/500VDC/25°C/70%RH					
	EMI Conduction&Radiation	Compliance to EN55022 class B, 72/245/CEE, 95/54/CE					
	EMS Immunity	Compliance to EN61000-4-2,3					
	LVD	Compliance to EN60950					
	E-mark	E8 10R-02 0633					
Other	Remote Control	optional(switch with 5m wire)					
	MTBF	37khrs min. MIL - HDBK - 217(25°C)					
	N.W/unit	4900g					
	Dimension(cm)	34.5*23*10.8(L*W*H)					
	Packing	Blister card/gift box, 2 units/12.5Kg/Ctn(41*31*38cm)					
	Output Receptacle	A, B, C, D, E, F, G, H, I, J, K, L, M, N(optional)					
	Applications	Home appliance, power tools, office and portable equipment and vehicle...etc.					


Note: Specification prior to change without notice

2000W Modified Sine Wave DC - AC Power Inverter

Inverter Expert **CAR Series - CAR2K**

MECHANICAL SPECIFICATION:

Unit: mm

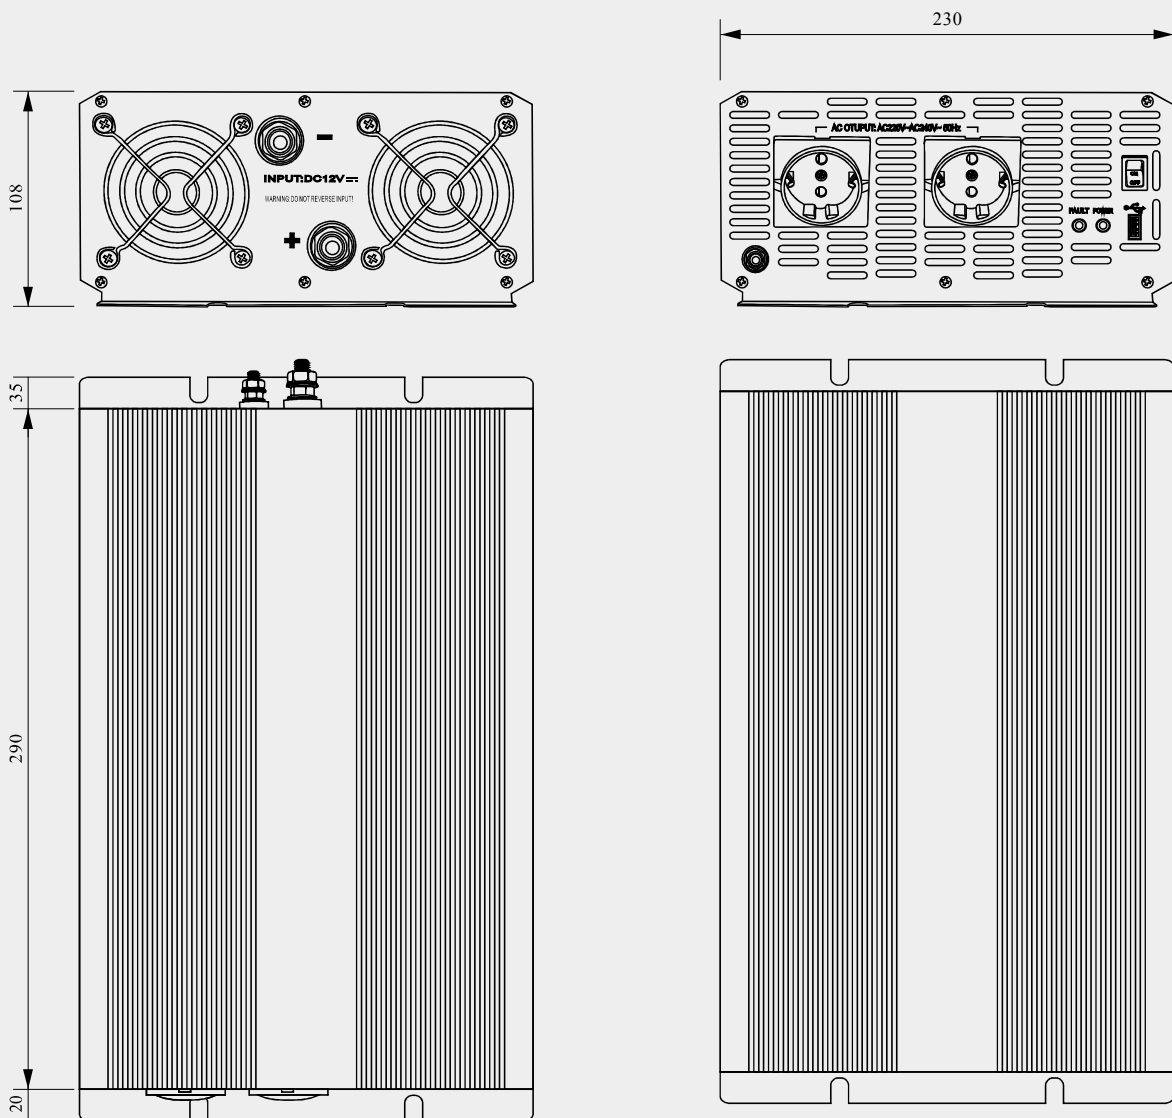

Output Receptacle (optional)

